



Image shown may not reflect actual engine

CATERPILLAR ENGINE SPECIFICATIONS

I-6, 4-Stroke-Cycle Diesel

Bore.....	110.0 mm (4.33 in)
Stroke.....	127.0 mm (5.0 in)
Displacement.....	7.2 L (442 in ³)
Aspiration.....	Turbocharged ATAAC
Compression Ratio.....	17:1
Rotation (from flywheel end).....	Counterclockwise
Lube Oil System (refill).....	28 L (7.4 U.S. gal)
Weight, Net Dry (approximate kg, lb).....	776 kg (1,711 lb)

FEATURES

Emissions

Meets Tier 3, Stage IIIA emission requirements. Tier 3 refers to EPA (U.S.) standards. Stage IIIA refers to European standards.

Worldwide Supplier Capability

Caterpillar

- Casts engine blocks and heads
- Machines critical components
- Assembles complete engine
- Factory-designed systems built at Caterpillar ISO 9001:2000 certified facilities
- Ownership of these manufacturing processes enables Caterpillar to produce high quality, dependable product.

Testing

Prototype testing on every model:

- proves computer design
- verifies system torsional stability
- functionality tests every model

Every Caterpillar engine is dynamometer tested under full load to ensure proper engine performance.

Full Range of Attachments

Wide range of bolt-on system expansion attachments, factory designed and tested.

Unmatched Product Support Offered Through Worldwide Caterpillar Dealer Network

More than 1,500 dealer outlets
Caterpillar factory-trained dealer technicians service every aspect of your industrial engine
99.7% of parts orders filled within 24 hours worldwide
Caterpillar parts and labor warranty
Preventive maintenance agreements available for repair before failure options

Scheduled Oil Sampling program matches your oil sample against Caterpillar set standards to determine:

- internal engine component condition
- presence of unwanted fluids
- presence of combustion by-products

Web Site

For all your industrial power requirements, visit www.cat-industrial.com.

STANDARD ENGINE EQUIPMENT

Air Inlet System

Air to air aftercooled (ATAAC)
Turbocharged

Control System

Electronic governing, PTO speed control
Programmable ratings
Cold mode start strategy
Automatic altitude compensation
Power compensation for fuel temperature
Programmable low and high idle and total engine limit
Electronic diagnostics and fault logging
Engine monitoring system
J1939 Broadcast (diagnostic and engine status)
ADEM™ A4 Electronic Control Unit (ECU)

Cooling System

Thermostats and housing, vertical outlet
Jacket water pump, centrifugal
Water pump, inlet

Exhaust System

Exhaust manifold, dry
Optional exhaust outlet

Flywheels and Flywheel Housing

SAE No. 1 Flywheel housing

Fuel System

HEUI™ injection
Fuel filter, secondary (2 micron high performance)
Fuel transfer pump
Fuel priming pump
ACERT™ Technology

Lube System


Crankcase breather
Oil cooler
Oil filler
Oil filter
Oil pan front sump
Oil dipstick
Oil pump (gear driven)

General

Paint, Caterpillar Yellow
Vibration damper
Lifting eyes

PERFORMANCE CURVES

IND - C (Intermittent) - DM9221-00

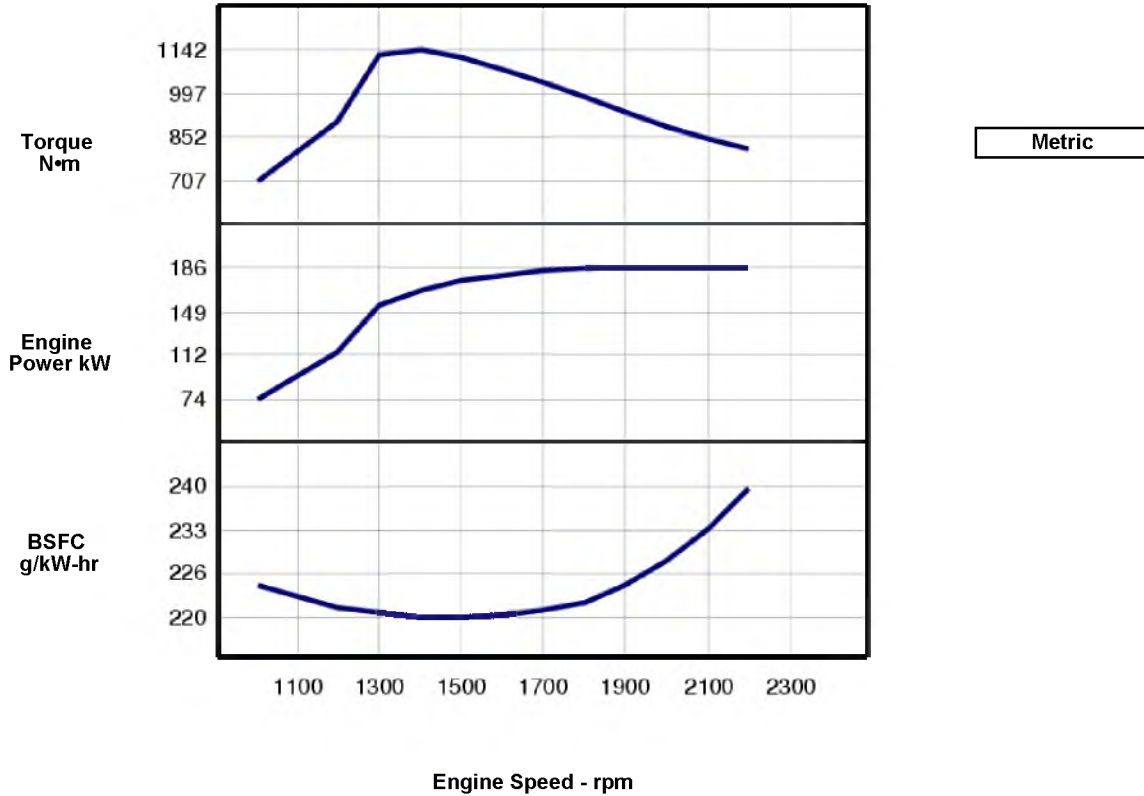

Engine Speed rpm	Engine Power kW	Torque N•m	BSFC g/kW-hr	Fuel Rate L/hr
2200	187	810	239.7	53.3
2100	187	848	233.7	51.9
2000	187	890	228.6	50.8
1900	187	937	224.7	50.0
1800	187	989	222.2	49.4
1700	184	1035	220.7	48.5
1600	180	1077	220	47.3
1500	175	1115	219.8	45.9
1400	167	1142	219.9	43.9
1300	154	1128	220.4	40.4
1200	114	906	221.3	30.0
1000	74	707	224.9	19.8




From the library of Barrington Diesel Club

RATINGS AND CONDITIONS

IND - C (Intermittent) Intermittent service where maximum power and/or speed are cyclic (time at full load not to exceed 50%).

Engine Performance Diesel Engines — 7 liter and higher All rating conditions are based on SAE J1995, inlet air standard conditions of 99 kPa (29.31 in. Hg) dry barometer and 25°C (77°F) temperature. Performance measured using a standard fuel with fuel gravity of 35° API having a lower heating value of 42,780 kJ/kg (18,390 btu/lb) when used at 29° C (84.2° F) with a density of 838.9 g/L.

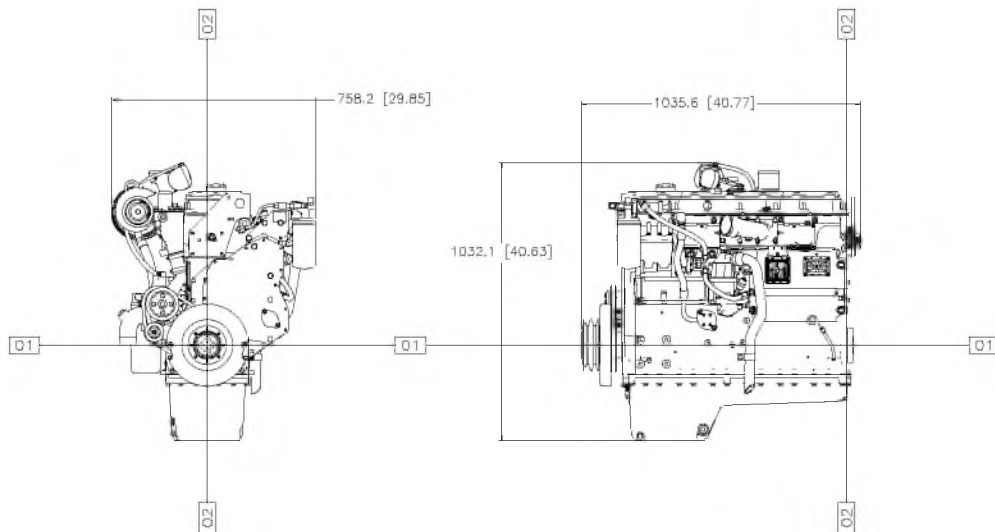

Engine Dimensions	
(1) Length	1035.6 mm
(2) Width	758.2 mm
(3) Height	1032.1 mm

Note: Do not use for installation design. See general dimension drawings for detail (Drawing # 2835788).

Performance Number: DM9221-00

Feature Code: C07DI01

Materials and specifications are subject to change without notice.

6757572

© 2006 Caterpillar

All rights reserved.

The International System of Units (SI) is used in this publication.

CAT, CATERPILLAR, their respective logos and "Caterpillar Yellow," as well as corporate and product identity used herein, are trademarks of Caterpillar and may not be used without permission.

